
SPLASH BLOCKS



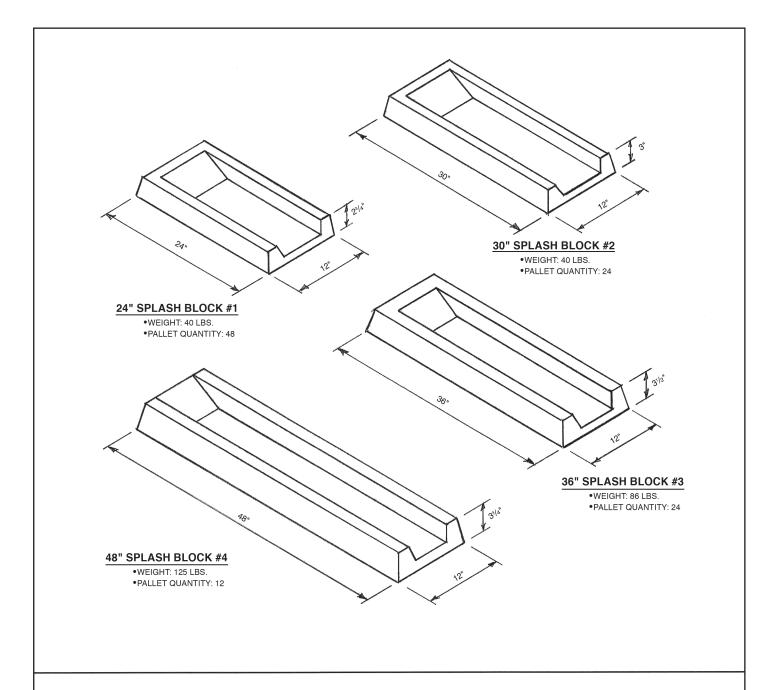

BASIC USES AND FEATURES

- For use under downspout outlet at ground level or at a roof level.
- Directs water and prevents washout under downspout outlet.
- Meets FHA standards for acceptable lengths.

COMPOSITION & MATERIALS

• Concrete: Air entrained, achieving 5000 PSI compressive strength in 28 days.

AVAILABLE FINISH

• Smooth As-cast Surfaces, natural concrete color.



800.845.7644

PRECAST CONCRETE FINISHES





Exposed Aggregate #1 Gray Crushed Limesone 3/8" Top Size



Exposed Aggregate #2 Pea Gravel 1/2" Top Size



Cuyahoga Blend



Light Sandblast Texture Natural Concrete Color



Smooth As-Cast Surface Natural Concrete Color



Scioto Blend



Buff PC201



Charcoal PC202



Light Buff PC215

NOTES:

- Available Finishes for precast concrete products are shown and described to indicate approximate color and texture involved.
- Photographic representation of finish texture is approximately 25 percent of actual size.
- Refer to Oberfields LLC® data sheets showing specific precast concrete products to see which finishes are applicable for those products.
- All Colored Precast "PC" finishes are only available in Light Sandblast texture.

