

MONROE®



The straight lines created by our Monroe® pavers are ideal for the homeowner that prefers the look of traditional brick. Utilization of various colors and a variety of patterns, provides the freedom to choose a design ranging from simple to complex.



DesignPAVE®

PREMIUM
CONCRETE
PAVERS

PRODUCT SPECS



a) Monroe® – 4" x 8"

All stocked Monroe® pavers are 2³/₈" thick
 Monroe Pavers also available 3¹/₈" thick


APPLICATIONS

Urban street parking, entrance areas, porte caches, crosswalks, esplanades, light duty parking lots, residential driveways, patios, walkways, pedestrian malls, medians, terraces, pool decks, sidewalks, garden paths, roof gardens

COMPOSITION AND MANUFACTURE

Monroe® pavers are made from a "no slump" concrete mix. Made under extreme pressure and high frequency vibrations, Monroe® pavers have an average compression strength greater than 8000psi, a water absorption maximum of 5% and will meet or exceed ASTM C-936 and freeze-thaw testing per section 8 of ASTM C-67.

INSTALLATION PATTERNS

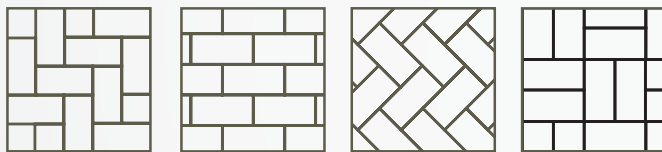

90° Herringbone Running Bond 45° Herringbone Basketweave

INSTALLATION

1. Excavate unsuitable, unstable or unconsolidable subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for use material (typically 4-6 in. of compacted base for light vehicular and pedestrian traffic) or as otherwise directed by Site Engineer/Architect/Landscape Architect.
2. Place bedding course of washed sand conforming to the grading requirements of ASTM C-33 to a maximum uniform depth of 1-1 1/2 in. (25-38mm) screeded to the grade and profile required.
3. Install Monroe® Pavers with joints approximately 1/8 in. (3mm).
4. Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaging edges.
5. Tamp pavers with a plate compactor, uniformly level, true to grade and free of movement.
6. Spread sand to 1/8 inch (3mm) thickness over entire paving area.
7. Make one more pass with plate compactor to fill joints with sand.

Complete installation and specification details are available by contacting your Oberfields Sales Representative.

PACKAGING INFO

PRODUCT	WEIGHT PER SQ. FT.	UNITS PER SQ. FT.	UNITS PER BAND	UNITS PER CUBE	WEIGHT PER CUBE	SQ. FT. PER UNIT	SQ. FT. PER BAND	SQ. FT. PER CUBE	COLORS STOCKED
Monroe®	27.6	4.7	81	486	2843	0.21	17.17	103	Brown, Canyon Creek, Charcoal, Earth, Flagstone