# STEP UNITS & RAILINGS



#### **BASIC USES AND FEATURES**


- For exterior use at entrances of houses, apartments and other facilities as applicable.
- Railing assemblies are designed for mounting to side(s) of step unit.
- All step units are 48" wide. Railings may be one or both sides.
- Pallet quantity is one (1) except as otherwise noted.


#### **COMPOSITION & MATERIALS**


- Concrete: Air entrained and fiber reinforced, achieving 5000 PSI strength in 28 days.
- Reinforcing: Steel rebars in top platform as required for size.
- Railing Assemblies: Wrought iron, prime painted; includes anchors and spacers.
- · Lifting brackets are available for step units.

## **AVAILABLE FINISH**

- Concrete: Smooth As-cast Surfaces, natural concrete color, except all treads and platforms have slip-resistant broom finish.
- For best results, steps should be sealed with a breathable sealer annually.
- Metal: All railings have paint primer finish.

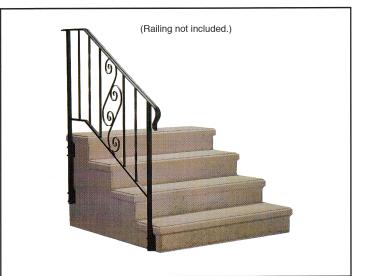

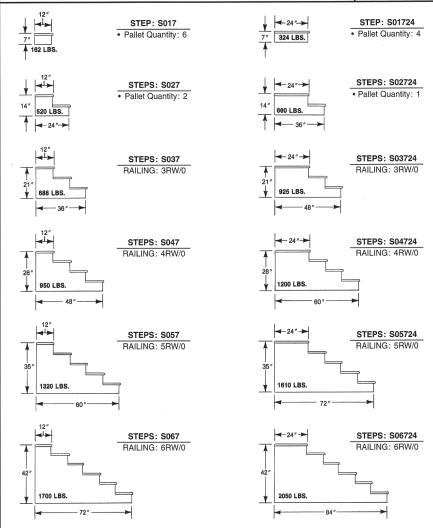

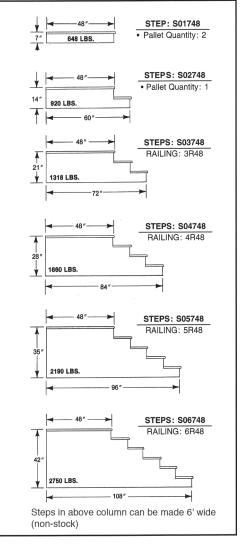



614.252.0955 740.369.7644 937.885.3711 800.845.7644 P.O. Box 362 Delaware, Ohio 43015-0362 oberfields.com

# PRECAST CONCRETE FINISHES





Exposed Aggregate #1 Gray Crushed Limesone 3/8" Top Size



Exposed Aggregate #2 Pea Gravel 1/2" Top Size



Cuyahoga Blend



Light Sandblast Texture Natural Concrete Color



Smooth As-Cast Surface Natural Concrete Color



Scioto Blend



Buff PC201



Charcoal PC202



Light Buff PC215

### NOTES:

- Available Finishes for precast concrete products are shown and described to indicate approximate color and texture involved.
- Photographic representation of finish texture is approximately 25 percent of actual size.
- Refer to Oberfields LLC® data sheets showing specific precast concrete products to see which finishes are applicable for those products.
- All Colored Precast "PC" finishes are only available in Light Sandblast texture.

