
DENSE CONCRETE WALK BLOCKS




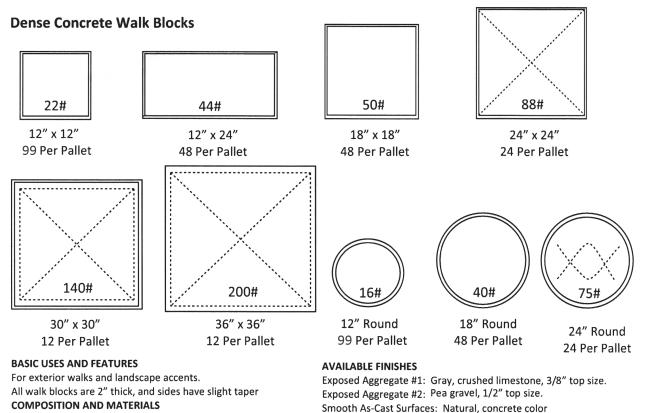

Concrete: Air entrained, achieving 5000 PSI compressive strength in 28 days.

Reinforcing: Steel rebars where indicated.

Machine-Made Walk Blocks

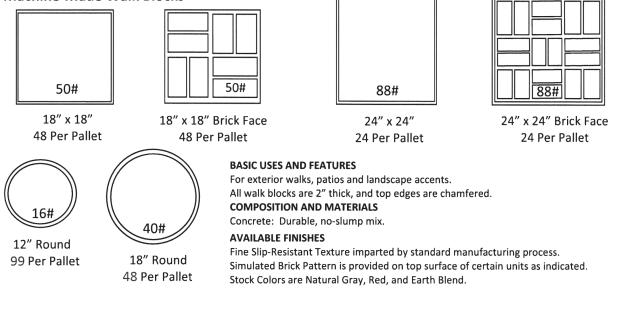



614.252.0955 740.369.7644 937.885.3711 800.845.7644 P.O. Box 362 Delaware, Ohio 43015-0362 oberfields.com

PRECAST & SITESCAPE

PRECAST CONCRETE FINISHES





Exposed Aggregate #1 Gray Crushed Limesone 3/8" Top Size



Light Sandblast Texture Natural Concrete Color



Buff PC201



Exposed Aggregate #2 Pea Gravel 1/2" Top Size



Smooth As-Cast Surface Natural Concrete Color



Charcoal PC202



Cuyahoga Blend



Scioto Blend



Light Buff PC215

NOTES:

- Available Finishes for precast concrete products are shown and described to indicate approximate color and texture involved.
- Photographic representation of finish texture is approximately 25 percent of actual size.
- Refer to Oberfields LLC[®] data sheets showing specific precast concrete products to see which finishes are applicable for those products.
- All Colored Precast "PC" finishes are only available in Light Sandblast texture.



614.252.0955 740.369.7644 937.885.3711 800.845.7644 P.O. Box 362 Delaware, Ohio 43015-0362 oberfields.com

PRECAST & SITESCAPE