

FLINT RIDGE®




Our new Flint Ridge® line incorporates random shapes and varying slate top textures to give added dimension and texture. Available in three nature-inspired shades, Flint Ridge® combines the character of natural stone with the proven durability of concrete.



DesignPAVE®

PREMIUM
CONCRETE
PAVERS

PRODUCT SPECS

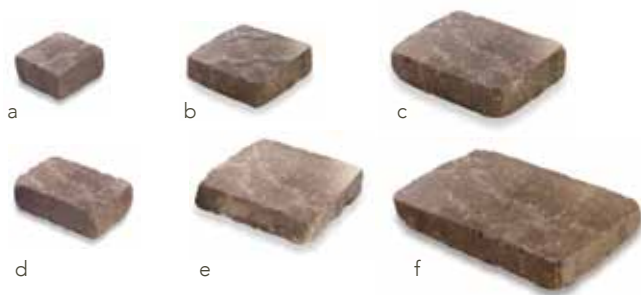

- a) Flint Ridge® Small Square – 5 1/2" x 5 1/2"
- b) Flint Ridge® Square – 8 3/16" x 8 3/16"
- c) Flint Ridge® Large Square – 11" x 11"
- d) Flint Ridge® Standard Rectangle – 8 1/4" x 5 1/2"
- e) Flint Ridge® Large Rectangle – 11" x 8 1/4"
- f) Flint Ridge® Jumbo Rectangle – 16 1/2" x 11"

All Flint Ridge® pavers are 2 3/4" thick.


APPLICATIONS

Urban street parking, entrance areas, porte caches, crosswalks, esplanades, light duty parking lots, residential driveways, patios, walkways, pedestrian malls, medians, terraces, pool decks, sidewalks, garden paths, roof gardens

COMPOSITION AND MANUFACTURE

Flint Ridge® pavers are made from a "no slump" concrete mix. Made under extreme pressure and high frequency vibrations, Flint Ridge® pavers have an average compression strength greater than 8000psi, a water absorption maximum of 5% and will meet or exceed ASTM C-936 and freeze-thaw testing per section 8 of ASTM C-67.

INSTALLATION PATTERNS

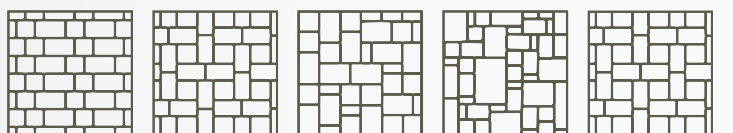

Muster D 40% Small Sq. 60% Standard Rec.	Muster K 28% Small Sq. 72% Standard Rec.	3 Piece Random 21% Large Rec. 46% Standard Rec. 33% Small Sq.	6 Piece Random 29% Jumbo Rec. 17% Large Rec. 18% Standard Rec. 7% Small Rec. 18% Large Sq. 11% Small Sq.	Jumbo Muster K 28% Large Sq. 72% Jumbo Rec.
--	--	--	--	---

PACKAGING INFO

PRODUCT	WEIGHT PER SQ. FT.	UNITS PER SQ. FT.	UNITS PER BAND	UNITS PER CUBE	SQ. FT. PER UNIT	SQ. FT. PER BAND	SQ. FT. PER CUBE	COLORS STOCKED
Small Square	32.0	4.76	48	384	0.21	10.08	81	Canyon Creek, Earth, Flagstone
Square	27.6	2.35	40	216	0.43	17.00	102	Canyon Creek, Earth, Flagstone
Standard Rectangle	32.0	3.17	48	288	0.32	15.36	91	Canyon Creek, Earth, Flagstone
Large Rectangle	32.0	1.58	32	128	0.63	20.16	81	Canyon Creek, Earth, Flagstone
Large Square	32.0	3.17	48	288	0.32	15.36	91	Canyon Creek, Earth, Flagstone
Jumbo Rectangle	32.0	0.79	16	64	1.27	20.32	81	Canyon Creek, Earth, Flagstone

INSTALLATION

- Excavate unsuitable, unstable or unconsolidable subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for use material (typically 4-6 in. of compacted base for light vehicular and pedestrian traffic) or as otherwise directed by Site Engineer/Architect/Landscape Architect.
- Place bedding course of washed sand conforming to the grading requirements of ASTM C-33 to a maximum uniform depth of 1-1 1/2 in. (25-38mm) screeded to the grade and profile required.
- Install Flint Ridge® Pavers with joints approximately 1/8 in. (3mm).
- Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaging edges.
- Tamp pavers with a plate compactor, uniformly level, true to grade and free of movement.
- Spread sand to 1/8 inch (3mm) thickness over entire paving area.
- Make one more pass with plate compactor to fill joints with sand.

Complete installation and specification details are available by contacting your Oberfields Sales Representative.

