

# ROSETTA® GRAND FLAGSTONE



Large natural flagstones have been a highly sought-after material for patios and walkways for generations.

Grand Flagstone maintains the attractive texture and scale of large natural flagstone, but compared to natural flagstone, can be laid in an easy-to-install pattern. Additionally, the unit thicknesses are consistent, making for a comfortable, quality finished installation



DesignPAVE®

PREMIUM  
CONCRETE  
PAVERS

# ROSETTA® GRAND FLAGSTONE

DesignPAVE®

## PRODUCT SPECS



Rosetta® Grand Flagstone\*

Dimensions – All Grand Flagstone is 1 3/4" thick


## APPLICATIONS

Urban street parking, entrance areas, porte caches, crosswalks, esplandes, light duty parking lots, residential driveways, patios, walkways, pedestrian malls, medians, terraces, pool decks, sidewalks, garden paths, roof gardens

## COMPOSITION AND MANUFACTURE

Rosetta® Grand Flagstone pavers are made from a "no slump" concrete mix. Made under extreme pressure and high frequency vibrations, Rosetta® Grand Flagstone pavers have an average compression strength greater than 8000psi, a water absorption maximum of 5% and will meet or exceed ASTM C-936 and freeze-thaw testing per section 8 of ASTM C-67.

## INSTALLATION PATTERNS

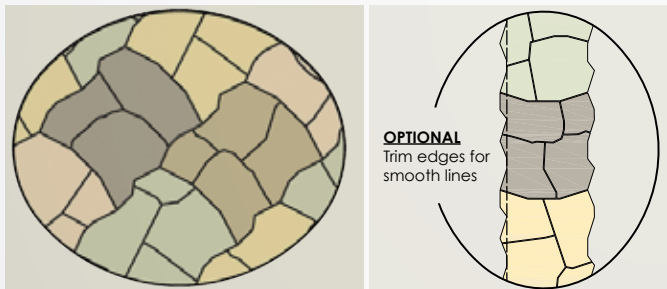

## INSTALLATION

1. Excavate unsuitable, unstable or unconsolidable subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for use material (typically 4-6 in. of compacted base for light vehicular and pedestrian traffic) or as otherwise directed by Site Engineer/Architect/Landscape Architect.
2. Place bedding course of washed sand conforming to the grading requirements of ASTM C-33 to a maximum uniform depth of 1-1 1/2 in. (25-38mm) screeded to the grade and profile required.
3. Install Vintage Rosetta® Grand Flagstone Pavers with joints approximately 1/8 in. (3mm).
4. Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaging edges.
5. Tamp pavers with a plate compactor, uniformly level, true to grade and free of movement.
6. Spread sand to 1/8 inch (3mm) thickness over entire paving area.
7. Make one more pass with plate compactor to fill joints with sand.

Complete installation and specification details are available by contacting your Oberfields Sales Representative.

## PACKAGING INFO

PRODUCT	WEIGHT PER SQ. FT.	UNITS PER SQ. FT.	UNITS PER BAND	UNITS PER CUBE	WEIGHT PER CUBE	SQ. FT. PER UNIT	SQ. FT. PER BAND	SQ. FT. PER CUBE	COLORS STOCKED
Grand Flagstone	20.5	N/A	N/A	64	2160	N/A	N/A	88	Cuyahoga, Scioto

614-252-0955  
937-885-3711  
800-845-7644

Fax 740-363-7644  
www.oberfields.com



**OBERFIELDS LLC**  
WHAT OUTDOOR LIVING SHOULD BE®