

# VINTAGE BELHAVEN®




Vintage Belhaven® pavers are perfect for the discerning homeowner that values the rustic, weathered appearance of cobblestones with the versatility of various sizes and textures. Vintage Belhaven® Pavers are a collection of six various size pavers that have a weathered surface enhanced by slightly chiseled edges. Its many modular sizes make it easy to create unique and interesting patterns for any application.



DesignPAVE®

PREMIUM  
CONCRETE  
PAVERS

## PRODUCT SPECS

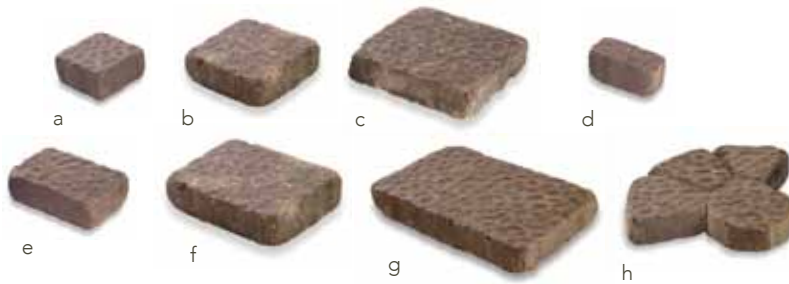

- a) Vintage Belhaven® Small Square – 5 1/2" x 5 1/2"
- b) Vintage Belhaven® Square – 8 3/16" x 8 3/16"
- c) Vintage Belhaven® Large Square – 11" x 11"
- d) Vintage Belhaven® Small Rectangle – 5 1/2" x 2 3/4"
- e) Vintage Belhaven® Standard Rectangle – 8 1/4" x 5 1/2"
- f) Vintage Belhaven® Large Rectangle – 11" x 8 1/4"
- g) Vintage Belhaven® Jumbo Rectangle – 16 1/2" x 11"
- h) Vintage Belhaven® Circle System – Circle Center, Small Circle Paver, Large Circle Paver and Rectangle Circle Paver.

All Belhaven® pavers are 2 3/4" thick.


## APPLICATIONS

Urban street parking, entrance areas, porte caches, crosswalks, esplanades, light duty parking lots, residential driveways, patios, walkways, pedestrian malls, medians, terraces, pool decks, sidewalks, garden paths, roof gardens

## COMPOSITION AND MANUFACTURE

Vintage Belhaven® pavers are made from a "no slump" concrete mix. Made under extreme pressure and high frequency vibrations, Vintage Belhaven® pavers have an average compression strength greater than 8000psi, a water absorption maximum of 5% and will meet or exceed ASTM C-936 and freeze-thaw testing per section 8 of ASTM C-67.

## INSTALLATION PATTERNS

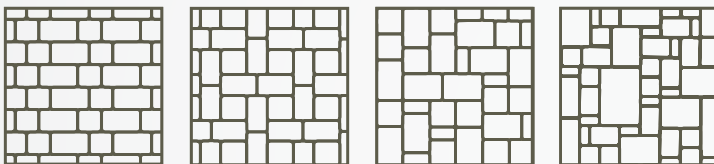

Muster D  
40% Small Sq.  
60% Standard Rec.

Muster K  
28% Small Sq.  
72% Standard Rec.

3 Piece Random  
51% Standard Rec.  
11% Small Rec.  
38% Small Sq.

6 Piece Random  
29% Jumbo Rec.  
17% Large Rec.  
18% Standard Rec.  
7% Small Rec.  
18% Large Sq.  
11% Small Sq.

## PACKAGING INFO

PRODUCT	WEIGHT PER	UNITS PER	UNITS PER	UNITS PER	WEIGHT PER	SQ. FT. PER	SQ. FT. PER	SQ. FT. PER	COLORS STOCKED
Small Square	32.0	4.76	48	384	2592	0.21	10.08	81	Canyon Creek, Earth, Flagstone
Square	27.6	2.35	40	216	2815	0.43	17.00	102	Canyon Creek, Earth, Flagstone
Large Square	32.0	1.19	24	96	2592	0.84	20.16	81	Canyon Creek, Earth, Flagstone
Small Rectangle	32.0	9.52	96	768	2592	0.11	10.56	81	Canyon Creek, Earth, Flagstone
Standard Rectangle	32.0	3.17	48	288	2912	0.32	15.36	91	Canyon Creek, Earth, Flagstone
Large Rectangle	32.0	1.58	32	128	2592	0.63	20.16	81	Canyon Creek, Earth, Flagstone
Jumbo Rectangle	32.0	0.79	16	64	2592	1.27	20.32	81	Canyon Creek, Earth, Flagstone
Circle	32.0	N/A	N/A	704	3520	Varies	N/A	110	Canyon Creek, Earth, Flagstone

## INSTALLATION

- Excavate unsuitable, unstable or unconsolidable subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for use material (typically 4-6 in. of compacted base for light vehicular and pedestrian traffic) or as otherwise directed by Site Engineer/Architect/Landscape Architect.
- Place bedding course of washed sand conforming to the grading requirements of ASTM C-33 to a maximum uniform depth of 1-1 1/2 in. (25-38mm) screeded to the grade and profile required.
- Install Vintage Belhaven® Pavers with joints approximately 1/8 in. (3mm).
- Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaging edges.
- Tamp pavers with a plate compactor, uniformly level, true to grade and free of movement.
- Spread sand to 1/8 inch (3mm) thickness over entire paving area.
- Make one more pass with plate compactor to fill joints with sand.

Complete installation and specification details are available by contacting your Oberfields Sales Representative.

