

VINTAGE FLINT RIDGE®




Vintage Flint Ridge® pavers offer the same slate-top textures in various sizes as the Flint Ridge®, but with tumbled corners, for a more weathered appearance. Colors appear more muted and compliment our other weathered products.



DesignPAVE®

PREMIUM
CONCRETE
PAVERS

PRODUCT SPECS

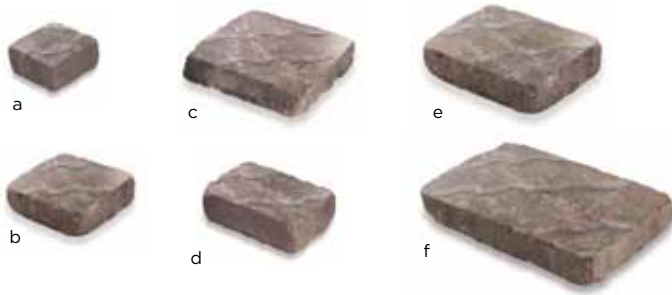

- a) Vintage Flint Ridge® Small Square – 5½" x 5½"
- b) Vintage Flint Ridge® Square – 8¼" x 8¼"
- c) Vintage Flint Ridge® Large Square – 11" x 11"
- d) Vintage Flint Ridge® Standard Rectangle – 8¼" x 5½"
- e) Vintage Flint Ridge® Large Rectangle – 11" x 8¼"
- f) Vintage Flint Ridge® Jumbo Rectangle – 16½" x 11"

All Flint Ridge® pavers are 2¾" thick


APPLICATIONS

Urban street parking, entrance areas, porte caches, crosswalks, esplanades, light duty parking lots, residential driveways, patios, walkways, pedestrian malls, medians, terraces, pool decks, sidewalks, garden paths, roof gardens

COMPOSITION AND MANUFACTURE

Vintage Flint Ridge® pavers are made from a "no slump" concrete mix. Made under extreme pressure and high frequency vibrations, Vintage Flint Ridge® pavers have an average compression strength greater than 8000psi, a water absorption maximum of 5% and will meet or exceed ASTM C-936 and freeze-thaw testing per section 8 of ASTM C-67.

INSTALLATION PATTERNS

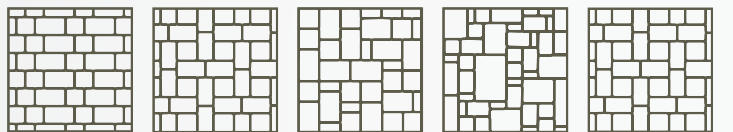

- Muster D
40% Small Sq.
60% Standard Rec.
- Muster K
28% Small Sq.
72% Standard Rec.
- 3 Piece Random
21% Large Rec.
46% Standard Rec.
33% Small Sq.
- 6 Piece Random
29% Jumbo Rec.
17% Large Rec.
18% Standard Rec.
7% Small Rec.
18% Large Sq.
11% Small Sq.
- Jumbo Muster K
28% Large Sq.
72% Jumbo Rec.

PACKAGING INFO

PRODUCT	WEIGHT PER SQ. FT.	UNITS PER SQ. FT.	UNITS PER BAND	UNITS PER CUBE	WEIGHT PER CUBE	SQ. FT. PER UNIT	SQ. FT. PER BAND	SQ. FT. PER CUBE	COLORS STOCKED
Small Square	32.0	4.76	48	384	2592	0.21	10.08	81	Canyon Creek, Earth, Flagstone
Square	27.6	2.35	40	216	2815	0.43	17.00	102	Canyon Creek, Earth, Flagstone
Standard Rectangle	32.0	3.17	48	288	2912	0.32	15.36	91	Canyon Creek, Earth, Flagstone
Large Rectangle	32.0	1.58	32	128	2592	0.63	20.16	81	Canyon Creek, Earth, Flagstone
Large Square	32.0	3.17	48	288	2912	0.32	15.36	91	Canyon Creek, Earth, Flagstone
Jumbo Rectangle	32.0	0.79	16	64	2592	1.27	20.32	81	Canyon Creek, Earth, Flagstone

INSTALLATION

1. Excavate unsuitable, unstable or unconsolidable subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for use material (typically 4-6 in. of compacted base for light vehicular and pedestrian traffic) or as otherwise directed by Site Engineer/Architect/Landscape Architect.
2. Place bedding course of washed sand conforming to the grading requirements of ASTM C-33 to a maximum uniform depth of 1-1 1/2 in. (25-38mm) screeded to the grade and profile required.
3. Install Vintage Flint Ridge® Pavers with joints approximately 1/8 in. (3mm).
4. Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaging edges.
5. Tamp pavers with a plate compactor, uniformly level, true to grade and free of movement.
6. Spread sand to 1/8 inch (3mm) thickness over entire paving area.
7. Make one more pass with plate compactor to fill joints with sand.

Complete installation and specification details are available by contacting your Oberfields Sales Representative.

