


VINTAGE WASHINGTON®

This elite collection of tumbled pavers offers you a rich palette of colors, textures, shapes and sizes crafted to mimic a rustic, weathered appearance.


A combination of large and small paving stones allows you to capture a time-worn appearance to artfully accent your landscape.

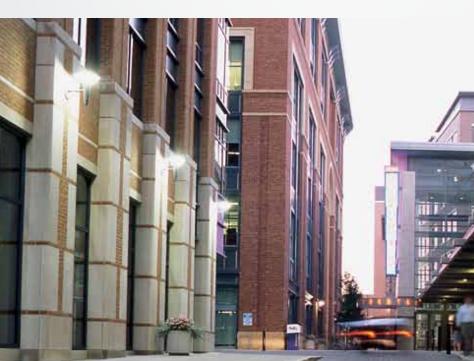

PREMIUM CONCRETE PAVERS

VINTAGE WASHINGTON®

PRODUCT SPECS



APPLICATIONS

Urban street parking, entrance areas, porte caches, crosswalks, esplandes, light duty parking lots, residential driveways, patios, walkways, pedestrian malls, medians, terraces, pool decks, sidewalks, garden paths, roof gardens

COMPOSITION AND MANUFACTURE

Vintage Washington[®] pavers are made from a "no slump" concrete mix. Made under extreme pressure and high frequency vibrations, Vintage Washington[®] pavers have an average compression strength greater than 8000psi, a water absorbation mazimum of 5% and will meet or exceed ASTM C-936 and freeze-thaw testing per section 8 of ASTM C-67.

INSTALLATION PATTERNS



		Ļ	Ц	1	5		Т	٦
	h	┢	ď	1	Г	Т		Ę
I		_			┝─┘	Ļ	_	
	\square	μ	Ц				Т	5
	h		Ц]	Е	Т	_	Ľ

Running Bond

10, 14, or 21

Muster D 40% Wash. 14 60% Wash. 21

Muster K 28% Wash. 14 72% Wash. 21

PACKAGING INFO

- a) Vintage Washington[®] $10 4^{1/8''} \times 5^{1/2''}$
- b) Vintage Washington[®] $14 5^{1/2''} \times 5^{1/2''}$
- c) Vintage Washington[®] 21 5¹/2" x 8¹/4"

All stocked Vintage Washington[®] Pavers are 2³/8" thick

Vintage Washington® 14 & 21 Pavers also available 31/8" thick

- d) Vintage Washington[®] Circle Circle center, small circle paver, large circle paver, Washington 10's
- e) Vintage Washington® $10-4^{1}\!/\!8'' \times 5^{1}\!/\!2''$

INSTALLATION

- Excavate unsuitable, unstable or unconsolidable subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregrate suitable for ase material (typically 4-6 in. of compacted base for light vehicular and pedestrian traffic) or as otherwise directed by Site Engineer/Architect/Landscape Architect.
- 2. Place bedding course of washed sand conforming to the grading requirements of ASTM C-33 to a maximum uniform depth of 1-1 1/2 in. (25-38mm) screeded to the grade and profile required.
- 3. Install Vintage Washington[®] Pavers with joints approximatley 1/8 in. (3mm).
- 4. Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaging edges.
- 5. Tamp pavers with a plate compactor, uniformaly level, true to grade and free of movement.
- 6. Spread sand to 1/8 inch (3mm) thickness ovrer entire paving area.
- 7. Make one more pass with plate compactor to fill joints with sand.

Complete installation and specification details are available by contacting your Oberfields Sales Representative.

PRODUCT	WEIGHT PE SQ. FT.	R UNITS PER SQ. FT.	UNITS per BAND	UNITS PER CUBE	WEIGHT PER CUBE	SQ. FT. per UNIT	SQ. FT. per BAND	SQ. FT. F CUBE	PER COLORS STOCKED
Vintage Washington® 10	27.6	6.34	80	640	2788	0.16	12.61	101	Antique, Canyon Creek, Charcoal, Desert Sand, Earth, Flagstone, Granite
Vintage Washington® 14	27.6	4.76	60	480	2760	0.21	12.50	100	Antique, Canyon Creek, Charcoal, Desert Sand, Earth, Flagstone, Granite
Vintage Washington® 21	27.6	3.17	54	324	2815	0.32	17.00	102	Antique, Canyon Creek, Charcoal, Desert Sand, Earth, Flagstone, Granite
Vintage Washington® Circle	27.6	N/A	N/A	318	1380	Varies	N/A	50	Antique, Canyon Creek, Charcoal, Desert Sand, Earth, Flagstone, Granite

614-252-0955 937-885-3711 800-845-7644 Fax 740-363-7644 www.oberfields.com



