

WASHINGTON®



Classic cobblestone patterns with squares and rectangles, create the European charm that make our Washington® pavers among the most popular landscape enhancements.



DesignPAVE®

PREMIUM
CONCRETE
PAVERS

PRODUCT SPECS



- a) Washington® 10 – 4¹/₈" x 5¹/₂"
- b) Washington® 14 – 5¹/₂" x 5¹/₂"
- c) Washington® 21 – 5¹/₂" x 8¹/₄"

All stocked Washington® Pavers are 2³/₈" thick
 Washington® 14 & 21 Pavers also available 3¹/₈" thick


APPLICATIONS

Urban street parking, entrance areas, porte caches, crosswalks, esplanades, light duty parking lots, residential driveways, patios, walkways, pedestrian malls, medians, terraces, pool decks, sidewalks, garden paths, roof gardens

COMPOSITION AND MANUFACTURE

Washington® pavers are made from a "no slump" concrete mix. Made under extreme pressure and high frequency vibrations, Washington® pavers have an average compression strength greater than 8000psi, a water absorption maximum of 5% and will meet or exceed ASTM C-936 and freeze-thaw testing per section 8 of ASTM C-67.

INSTALLATION PATTERNS

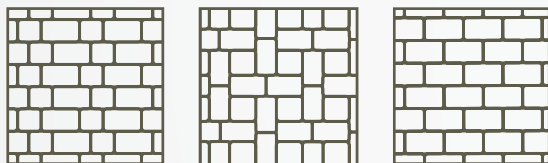

Muster D
 40% Wash. 14
 60% Wash. 21

Muster K
 28% Wash. 14
 72% Wash. 21

Running Bond
 10, 14, or 21

INSTALLATION

1. Excavate unsuitable, unstable or unconsolidable subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for use material (typically 4-6 in. of compacted base for light vehicular and pedestrian traffic) or as otherwise directed by Site Engineer/Architect/Landscape Architect.
2. Place bedding course of washed sand conforming to the grading requirements of ASTM C-33 to a maximum uniform depth of 1-1 1/2 in. (25-38mm) screeded to the grade and profile required.
3. Install Washington® Pavers with joints approximately 1/8 in. (3mm).
4. Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaging edges.
5. Tamp pavers with a plate compactor, uniformly level, true to grade and free of movement.
6. Spread sand to 1/8 inch (3mm) thickness over entire paving area.
7. Make one more pass with plate compactor to fill joints with sand.

Complete installation and specification details are available by contacting your Oberfields Sales Representative.

PACKAGING INFO

PRODUCT	WEIGHT PER SQ. FT.	UNITS PER SQ. FT.	UNITS PER BAND	UNITS PER CUBE	WEIGHT PER CUBE	SQ. FT. PER UNIT	SQ. FT. PER BAND	SQ. FT. PER CUBE	COLORS STOCKED
Washington® 10	27.6	6.34	80	640	2788	0.16	12.61	101	Antique, Autumn, Canyon Creek, Charcoal, Earth, Flagstone, Granite
Washington® 14	27.6	4.76	60	480	2760	0.21	12.50	100	Antique, Autumn, Canyon Creek, Charcoal, Earth, Flagstone, Granite
Washington® 21	27.6	3.17	54	324	2815	0.32	17.00	102	Antique, Autumn, Canyon Creek, Charcoal, Earth, Flagstone, Granite
Washington® Circle	27.6	N/A	N/A	318	1380	Varies	N/A	50	Antique, Autumn, Canyon Creek, Charcoal, Earth, Flagstone, Granite

