

WASHINGTON® PERMEABLE




Being green is easy with our line of eco-friendly permeable pavers. The design of the Washington® Permeable pavers allows water to flow around and through the paver joints effortlessly.



DesignPAVE®

PREMIUM
CONCRETE
PAVERS

PRODUCT SPECS

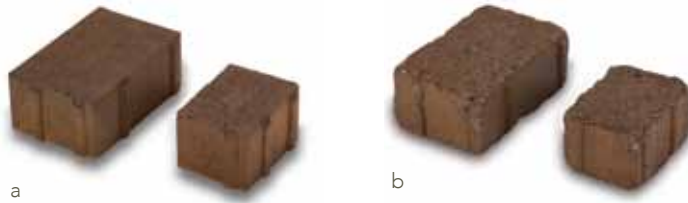

a) Washington® Permeable Pavers

21 / 10 Combo*

Full 5 1/2" x 8 1/4" x 3 1/8"

Half 5 1/2" x 4 1/8" x 3 1/8"

b) Vintage Washington® Permeable Pavers

21 / 10 Combo*

Full 5 1/2" x 8 1/4" x 3 1/8"

Half 5 1/2" x 4 1/8" x 3 1/8"


APPLICATIONS

Urban street parking, entrance areas, porte caches, crosswalks, esplanades, light duty parking lots, residential driveways, patios, walkways, pedestrian malls, medians, terraces, pool decks, sidewalks, garden paths, roof gardens

COMPOSITION AND MANUFACTURE

Washington® Permeable pavers are made from a "no slump" concrete mix. Made under extreme pressure and high frequency vibrations, Washington® Permeable pavers have an average compression strength greater than 8000psi, a water absorption maximum of 5% and will meet or exceed ASTM C-936 and freeze-thaw testing per section 8 of ASTM C-67.

INSTALLATION PATTERNS

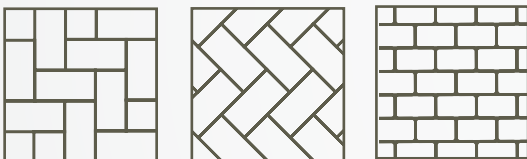

90° Herringbone

45° Herringbone

Running Bond 21

INSTALLATION

1. Excavate unsuitable, unstable or unconsolidable subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for use material (typically 4-6 in. of compacted base for light vehicular and pedestrian traffic) or as otherwise directed by Site Engineer/Architect/Landscape Architect.
2. Place bedding course of washed sand conforming to the grading requirements of ASTM C-33 to a maximum uniform depth of 1-1 1/2 in. (25-38mm) screeded to the grade and profile required.
3. Install Washington® Permeable Pavers with joints approximately 1/8 in. (3mm).
4. Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaging edges.
5. Tamp pavers with a plate compactor, uniformly level, true to grade and free of movement.
6. Spread sand to 1/8 inch (3mm) thickness over entire paving area.
7. Make one more pass with plate compactor to fill joints with sand.

Complete installation and specification details are available by contacting your Oberfields Sales Representative.

PACKAGING INFO

PRODUCT	WEIGHT PER SQ. FT.	UNITS PER SQ. FT.	UNITS PER BAND	UNITS PER CUBE	WEIGHT PER CUBE	SQ. FT. PER UNIT	SQ. FT. PER BAND	SQ. FT. PER CUBE	COLORS STOCKED
Washington® Full Permeable Paver 21/10 Combo	36.4	3.17	N/A	154	1929	0.32	N/A	48.5	Special Order Only
Washington® Half Permeable Paver 21/10 Combo	36.4	6.34	N/A	28	1929	0.16	N/A	4.5	Special Order Only