




**HOHMANN & BARNARD, INC.**  
A MiTek - BERKSHIRE HATHAWAY COMPANY

# Flashing and Reglets

## Copper Thru-Wall Flashing

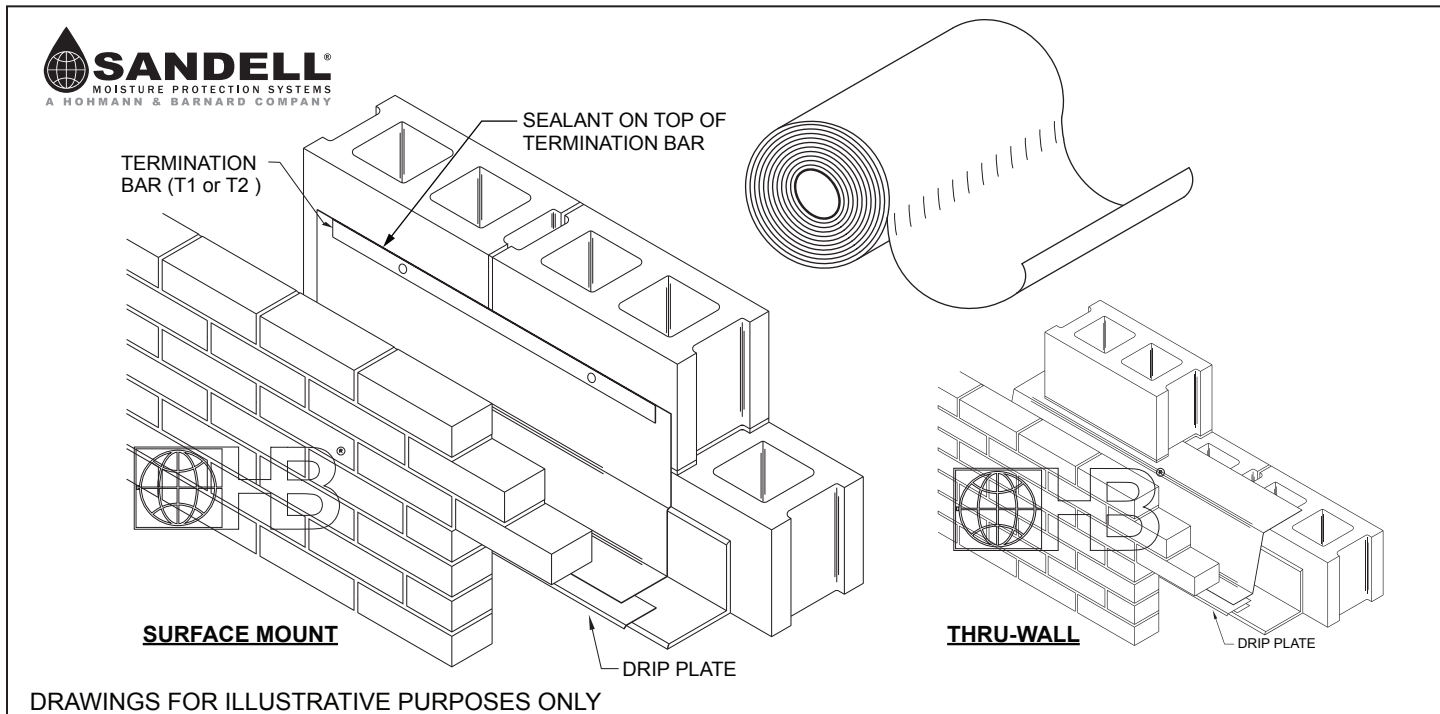

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

**Material:** Copper sheet used in the fabrication of copper laminates conforms to ASTM B370 (110 Alloy)

**C-Coat™ Flashing**

- soft-tempered copper bonded on both sides with an elastic, asphalt compound
- the flexibility and toughness of copper are combined with the superior water-proofing of elastic, asphalt-compound coating
- copper is shielded from acids, alkalis and electrolysis that may be present in uncured mortar joints
- the asphalt coating is self-sealing in case of puncture

**C-Fab™ Flashing**

- soft-tempered copper bonded on both sides with an asphalt-saturated glass fabric scrim
- asphalt-saturated glass fabric adds protection to copper during shipment, while adding another layer of waterproofing and chemical resistance
- coarse texture aids in bonding with mortar

**C-Kraft™ Duplex Flashing**

- soft-tempered copper bonded on both sides with creped kraft paper, saturated in waterproofing asphalt
- end product is lighter weight than C-Fab™, and slightly less expensive.

**NOTE:**

- An optional stainless steel drip edge is recommended to ensure diversion of moisture to outside of building (product can be cut flush with exterior wall)
- Surface mount applications should be attached with a stainless steel or aluminum termination bar
- Surface-mount is the preferred method of installation when using air barriers.

**\* Please refer to Hohmann & Barnard installation instructions for more information.**

- C-Coat™ Flashing (25-foot roll)
- C-Fab™ Flashing (25-foot roll)
- C-Kraft™ Duplex Flashing (60-foot roll)

**Width:**

- 12"    16"    18"    20"
- 24"    32"    36"    Other \_\_\_\_\_

**Weight:**

- 3 oz.    5 oz.    7 oz.

**Corners (12 oz.):**

- inside    outside    end dam

H&B Asphalt Mastic (5 gal. pail)

A high-grade, asphalt-based cement used in bonding asphalt-coated flashing to construction surfaces. It provides a strong, flexible waterproof barrier with excellent adhesion and allows for expansion or contraction caused by temperature fluctuation or building movement.

**OPTIONAL: Stainless Steel DP - Drip Plate:**

- 1 1/2"    3"    Other \_\_\_\_\_

**OPTIONAL: Termination Bar:**

(for surface-mount applications)

- |                          |                          |                          |                          |
|--------------------------|--------------------------|--------------------------|--------------------------|
| STAINLESS STEEL          |                          | ALUMINUM                 |                          |
| <input type="radio"/> T1 | <input type="radio"/> T2 | <input type="radio"/> T1 | <input type="radio"/> T2 |

**HOHMANN & BARNARD, Inc.**  
30 Rasons Court | Hauppauge, NY 11788  
CORPORATE HEADQUARTERS  
T: 800.645.0616 F: 631.234.0683  
[www.h-b.com](http://www.h-b.com)

**Branch/Subsidiary Locations:**  
ALABAMA - ILLINOIS - MARYLAND  
NEW YORK - PENNSYLVANIA - TEXAS  
CANADA

© HOHMANN & BARNARD, INC. - 2013