


Flashing and Reglets

Copper-Fabric™ NA

Copper Fabric Flashing

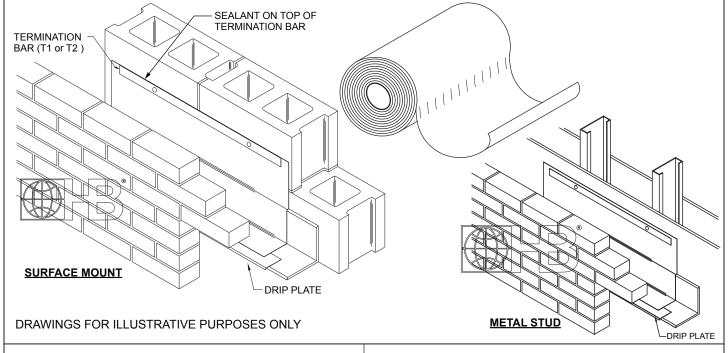

Material:

Copper sheet used in the fabrication of copper laminates conforms to ASTM B370 (110 Alloy).

Copper-Fabric™ NA Copper Fabric Flashing is a composite membrane consisting of a polyethylene film laminated to BOTH sides of a 3, 5, or 7 oz. copper sheet to create a superior flashing that can **also serve as a drip edge**.

- Suitable for thru-wall or surface-mount usage.
- Available with 3, 5, or 7 oz. copper sheet.
- UV-resistant for up to 180 days.
- Highly resistant to oils and will repel most chemicals
- Extremely tough, with excellent impact and tear resistance.
- Maintains flexibility in extreme heat or cold weather environments.
- Asphalt-free composition compatible with a wide variety of sealants.
- Available in widths from 12" 36", other widths available upon request
- * Please refer to Hohmann & Barnard installation instructions for more information.

Width: (25 ft. rolls)
☐ 12" ☐ 20" ☐ 32"
16"
☐ 18" ☐ Other
Weight: (film color)
3 oz. (gray) 5 oz. (red) 7 oz. (beige)
Stainless Steel Drip Plate:
1 ½" 3" Other
Flex-Flash® Drip Edge: Copper-Fabric™ NA as Drip Edge:
Termination Bar:
Stainless Steel (Type 304)
Aluminum
Plastic
HB Sealant 1-Quart Tube
IMPORTANT: Since each construction project is unique, the appropriate selection
and use of any product contained herein must be determined by competent

architects, engineers and other appropriate professionals who are familiar with the

specific requirements of the project in question.

HOHMANN & BARNARD, Inc.

30 Rasons Court | Hauppauge, NY 11788 CORPORATE HEADQUARTERS T: 800.645.0616 F: 631.234.0683

www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - ILLINOIS - MARYLAND
NEW YORK - PENNSYLVANIA - TEXAS
UTAH - CANADA

© HOHMANN & BARNARD, INC. - 2015