




**HOHMANN & BARNARD, INC.**  
A MiTek - BERKSHIRE HATHAWAY COMPANY

# Flashing and Reglets Enviro-Barrier™

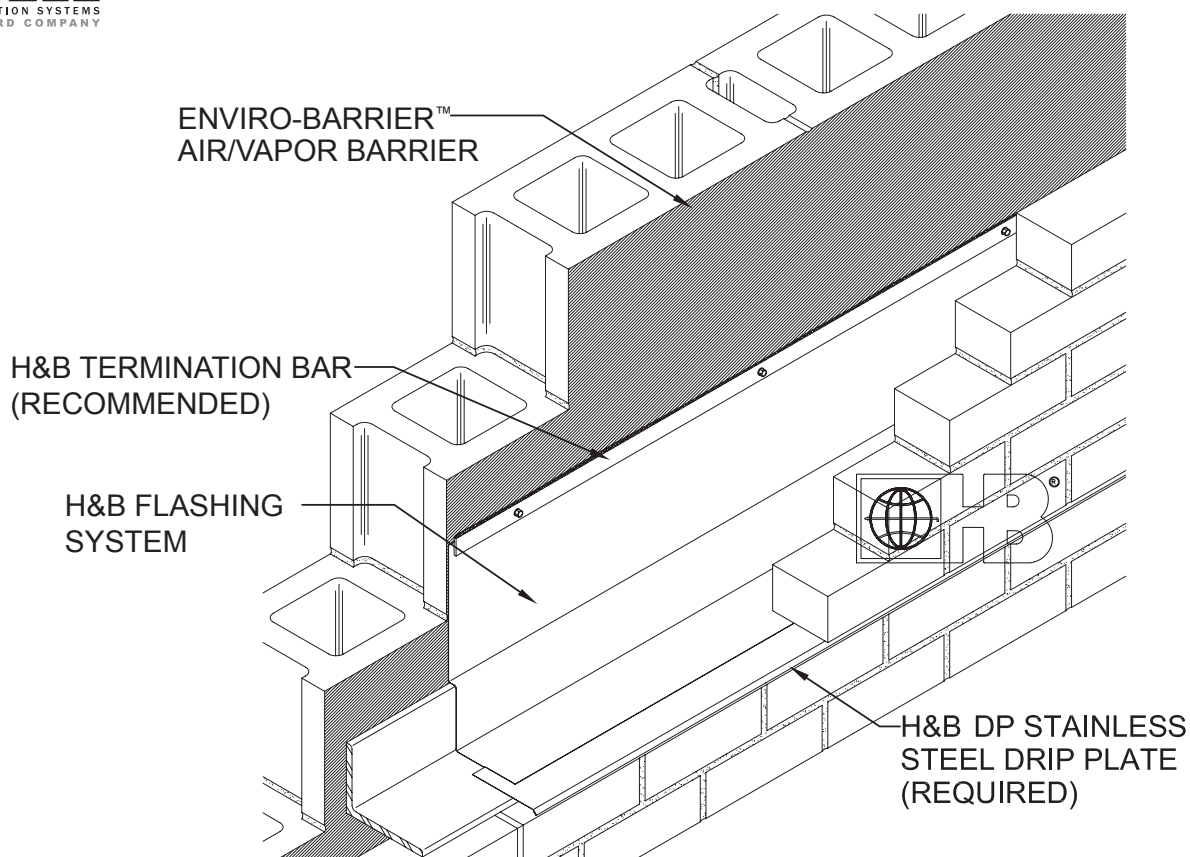

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

### ENVIRO-BARRIER™ Air /Vapor Barrier

Single component, fluid applied, elastomeric membrane

#### Product Description:

- Elastomeric membrane for above grade wall assemblies.
- Asphalt free formulation.
- VOC-Free, HAP's-Free & Asbestos-Free.
- Remains flexible over a wide temperature range.
- Exceeds the highest industry standards for air barrier performance.
- Maintains excellent adhesion on most construction materials.
- Cost effective.

#### Basic Uses:

H&B's Enviro-Barrier™ features an asphalt-free formulation and maintains excellent adhesion on most construction materials including exterior gypsum board, CMU, concrete, stone, metal and much more.

#### Application:

Enviro-Barrier™ must be applied to a surface that is free from all foreign matter. This material should remain dry until it has cured. Enviro-Barrier™, can be brushed, rolled, or sprayed; and should only be applied to above grade wall assemblies. Visit [h-b.com](http://h-b.com) for detailed instructions.

<b>Color:</b>	Light Blue Curing to Blue
<b>Coverage Rate:</b>	25 sq. ft. (60 mils wet/40 mils dry) per gallon.
<b>Solids by Weight:</b>	65%
<b>Weight Per Gallon:</b>	10.2 pounds
<b>UV Resistance:</b>	Up to 120 Days
<b>Application Temperature:</b>	40° – 120° F
<b>Recyclables By Weight:</b>	30%
<b>Dry Time:</b>	
<b>Tack Free:</b>	2 – 4 hrs
<b>Full Cure:</b>	4 – 24 hrs
<b>Testing:</b>	<b>ASTM E2178, ASTM E96, and ASTM E2357</b>

- 5 Gallon Pail
- 55 Gallon Drum

**HOHMANN & BARNARD, Inc.**  
30 Rasons Court | Hauppauge, NY 11788  
CORPORATE HEADQUARTERS  
T: 800.645.0616 F: 631.234.0683  
[www.h-b.com](http://www.h-b.com)

**Branch/Subsidiary Locations:**  
ALABAMA - ILLINOIS - MARYLAND  
NEW YORK - PENNSYLVANIA - TEXAS  
CANADA

© HOHMANN & BARNARD, INC. - 2012