


# Flashing and Reglets

## Flex-Flash® Flashing

### Self Adhering Flashing

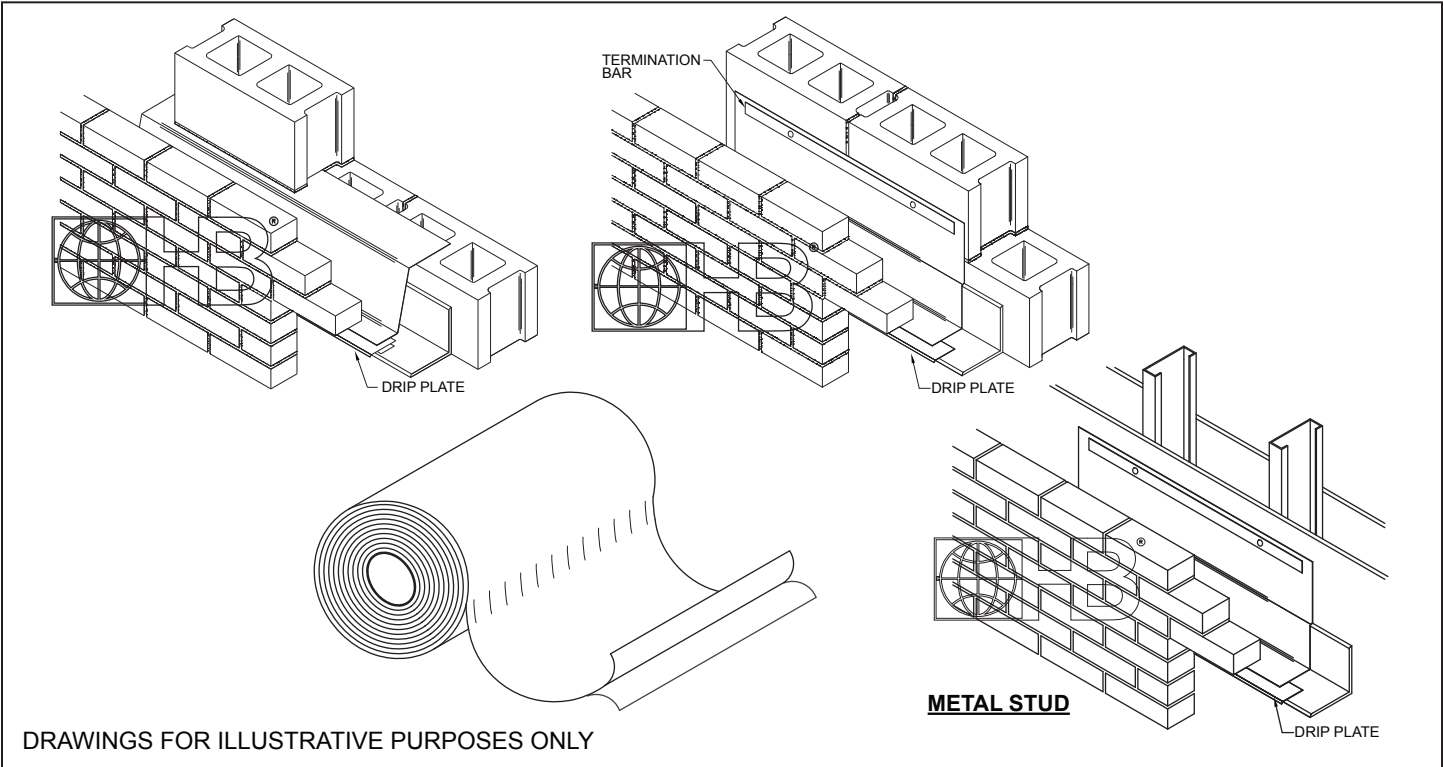

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

#### Flex-Flash® Flashing

*Thru-Wall/Surface-Mount Flashing*

Flex-Flash® is a polyester scrim reinforced 40-mil thick membrane formulated with Elvaloy® Kee\*. Flex-Flash® has a pressure-sensitive, clear adhesive that will not drool when exposed to UV or heat.

- Extremely tough, with excellent impact and tear resistance.
- Flexibility is maintained in all weather environments, even in extreme heat or cold.
- Highly resistant to oils and will repel most chemicals.
- Compatible with most silicone and urethane sealants.
- Not susceptible to degradation by UV.

**U.S. Patent No. 6,584,746**  
*Other Patents Pending*

Flex-Flash® conforms to:

- **ASTM D412-99a**
- **ASTM D2240-00**
- **ASTM D624-00 Die C**
- **ASTM G154-00a**

\*Elvaloy® is a registered trademark of the DuPont Company

**\* Please refer to Hohmann & Barnard installation instructions for more information.**

#### Sizes: (Rolls are 75 ft. long)

- Widths:  12"  16"  18"  20"  24"  
 36"  Other \_\_\_\_\_

#### Stainless Steel DP - Drip Plate:

- 1 1/2"  3"  Other \_\_\_\_\_

#### Flex-Flash® Drip Edge:

- 3"

#### Termination Bar:

- Stainless Steel (*Type 304*)  
 Aluminum  
 Plastic

- HB Sealant: 1 Quart Tube**  **HB Sealant: 2 Gallon Pail**

- Primer-SA**  
Water-Based Self-Adhering Flashing Primer (5 gal. pail)

#### NOTE:

- See [www.h-b.com](http://www.h-b.com) for sealant compatibility info.

**IMPORTANT:** Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question.