


Flashing and Reglets Mighty-Flash TM Stainless Steel Fabric Flashing

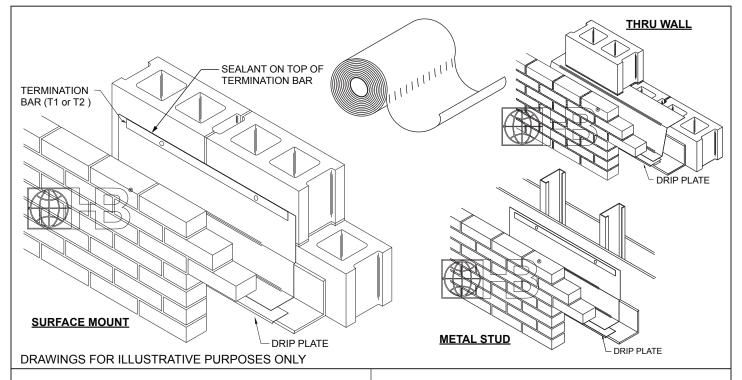

Technical Data:

Puncture (PSI) ASTM E154 2,500+
Tensile ASTM D412 100,000+
Fire Resistant ASTM E84 Pass
Mold Resistant ASTM D3273 Pass

Description & Benefits:

Mighty-Flash™ is a stainless steel fabric flashing, a Class A material consisting of a layer of polymeric fabric with a single sheet of 304 stainless steel bonded to one side. It is an innovative product featuring excellent puncture and tear resistance, designed to last for the life of the wall.

- Flexible and easy to form on the jobsite
- Rolls are 60' long
- Membrane thickness .004 in
- Stainless Steel thickness: .003 in
- Available in 12",16",18", 24" & 36" widths
- Fire resistant: ASTM E84 tested,a Class A material
- Mold resistant: ASTM D3273 tested
- · Heat resistant: no degradation in high heat applications
- UV-resistant for up to 180 days.
- 60% Recycled Content
- Recyclable
- Lifetime Warranty
- Please refer to Hohmann & Barnard installation instructions for more information.

Width: (60 ft. rolls) ☐ 12" ☐ 16" ☐ 18" ☐ 24" ☐ 36"
Stainless Steel Drip Plate: 1 ½"
Flex-Flash® Drip Edge: 3"
Termination Bar: Stainless Steel (Type 304) Plastic
HB Sealant 1-Quart Tube X-Seal Splice Tape (4" wide)

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question.

HOHMANN & BARNARD, Inc.

30 Rasons Court | Hauppauge, NY 11788 CORPORATE HEADQUARTERS T: 800.645.0616 F: 631.234.0683

www.h-b.com

Branch/Subsidiary Locations: ALABAMA - ILLINOIS - MARYLAND NEW YORK - PENNSYLVANIA - TEXAS UTAH - CANADA © HOHMANN & BARNARD, INC. - 2015