


HOHMANN & BARNARD, INC.
a MiTek company

Gripstay™ Anchors, Channels & Ties

360 Gripstay™ Channel

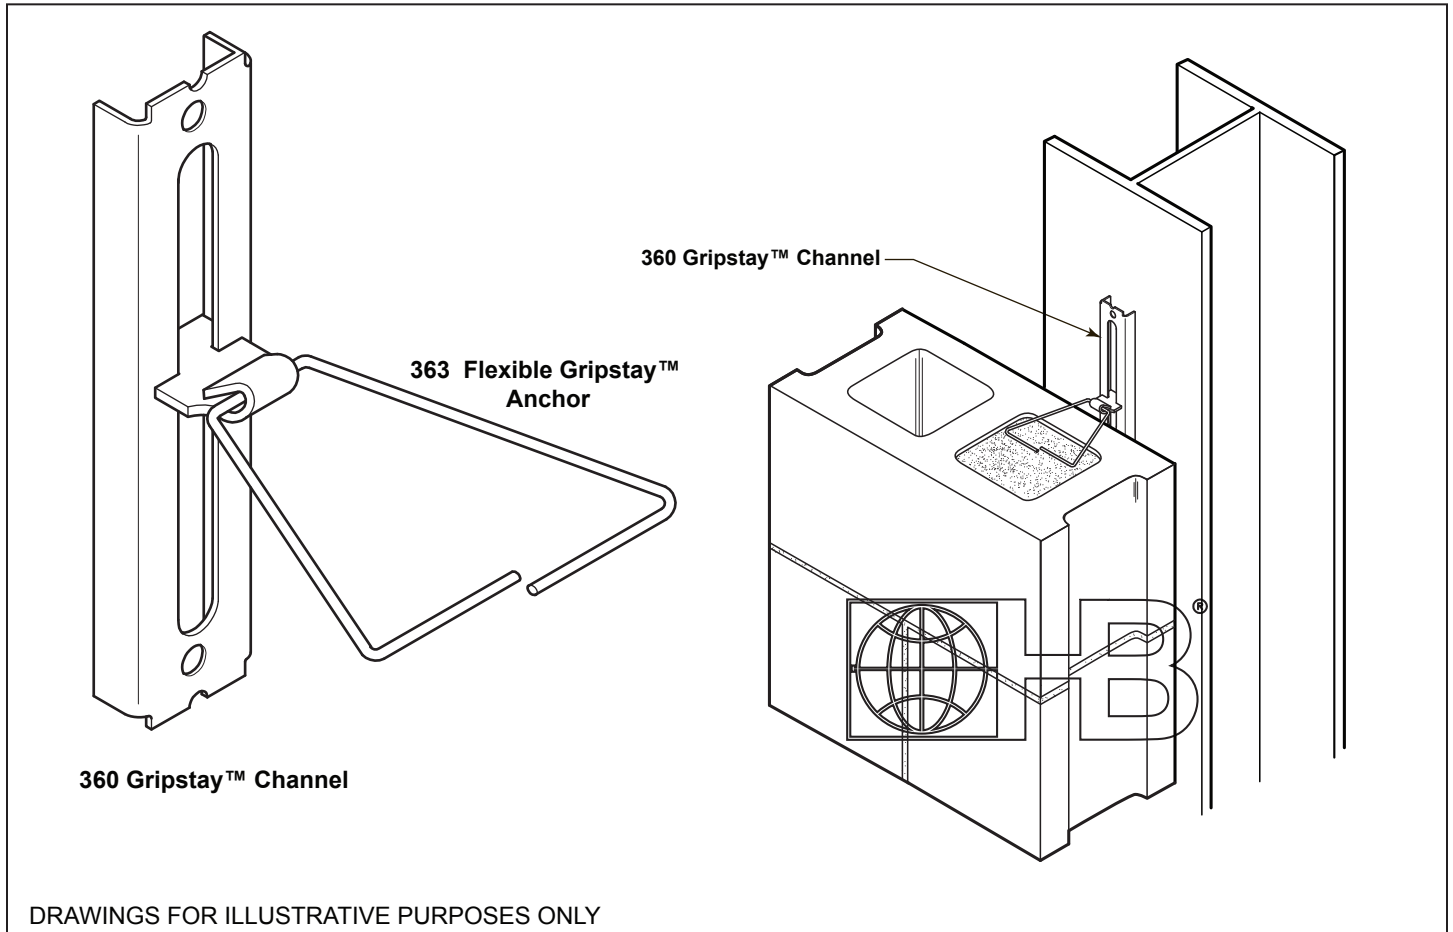

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

The **360 Gripstay™ Channel** welds onto steel web or flange to accept any type of Gripstay™ Anchor.

Sheet Metal (Carbon Steel):

ASTM A1008/A1008M

Zinc Coating:

ASTM A653/A653M (0.6 oz/ft²) (Mill Galvanized)

ASTM A153/A153M-B2 Class B (sheet metal ties and anchors Hot-Dip Galvanized after fabrication).

Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft²

Sheet Metal (Stainless Steel):

ASTM A666, ASTM A480/ASTM A480M, and ASTM A240/A240M - AISI Type 304 or Type 316

U.S. patent No. 5,063,722

Dimensions:

Thickness: 14 gauge, 12 gauge, or 11 gauge

Length: 7 1/2" (5 1/2" vertical adjustability)

Hole size: 5/16"

Finishes:

Mill Galvanized

Hot-Dip Galv.

Stainless Steel:

Type 304

Type 316

Thickness:

14 gauge

12 gauge

11 gauge

Note: Hohmann & Barnard recommends Stainless Steel for maximum protection against corrosion.

HOHMANN & BARNARD, Inc.

30 Rasons Court | Hauppauge, NY 11788
CORPORATE HEADQUARTERS

T: 800.645.0616 F: 631.234.0683

www.h-b.com

Branch/Subsidiary Locations:

ALABAMA - ILLINOIS - MARYLAND

NEW YORK - PENNSYLVANIA - TEXAS

CANADA

© HOHMANN & BARNARD, INC. - 2015