


Moisture Protection

Enviro-Barrier™ VP

Vapor Permeable Air Barrier

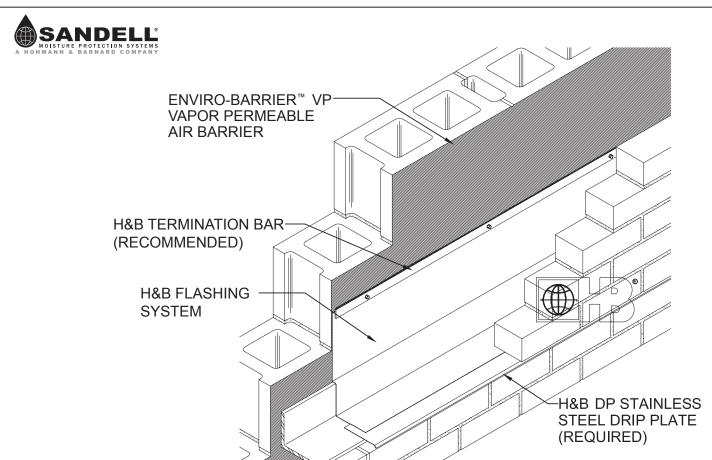

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

ENVIRO-BARRIER™ Vapor Permeable Air Barrier

Single component, fluid applied, elastomeric membrane

Product Description:

- Elastomeric membrane for above grade wall assemblies.
- Asphalt free formulation.
- VOC-Free, HAP's-Free & Asbestos-Free.
- Remains flexible over a wide temperature range.
- Exceeds the highest industry standards for air barrier performance.
- Maintains excellent adhesion on most construction materials.
- Cost effective.

Basic Uses:

H&B's Enviro-Barrier™ VP features an asphalt-free formulation and maintains excellent adhesion on most construction materials including exterior gypsum board, CMU, concrete, stone, metal and much more.

Application:

Enviro-Barrier™ VP must be applied to a surface that is free from all foreign matter. This material should remain dry until it has cured. Enviro-Barrier™ VP, can be brushed, rolled, or sprayed; and should only be applied to above grade wall assemblies. Visit h-b.com for detailed instructions.

Color: Light Blue Curing to Blue

Coverage Rate:

CMU/CONCRETE: 60 sq. ft. (25 mils wet) per gallon EXTERIOR SHEATHING: 75 sq. ft. (20 mils wet) per gallon

Solids by Weight: 65%

Weight Per Gallon: 10.2 pounds

Perm Rating : 10 perms (ASTM E-96)

UV Resistance: Up to 120 Days **Application Temperature:** $40^{\circ} - 120^{\circ} \, \text{F}$

Recyclables By Weight: 30%

Dry Time:

Tack Free:2-4 hrsFull Cure:4-24 hrs

Testing: ASTM E2178, ASTM E96, and

ASTM E2357 5 Gallon Pail

55 Gallon Pail

HOHMANN & BARNARD, Inc.

30 Rasons Court | Hauppauge, NY 11788 CORPORATE HEADQUARTERS T: 800.645.0616 F: 631.234.0683

www.h-b.com

Branch/Subsidiary Locations: ALABAMA - ILLINOIS - MARYLAND NEW YORK - PENNSYLVANIA - TEXAS CANADA © HOHMANN & BARNARD, INC. - 2012