


# Ties & Anchors - Miscellaneous

## 344 - Rigid Partition Anchor

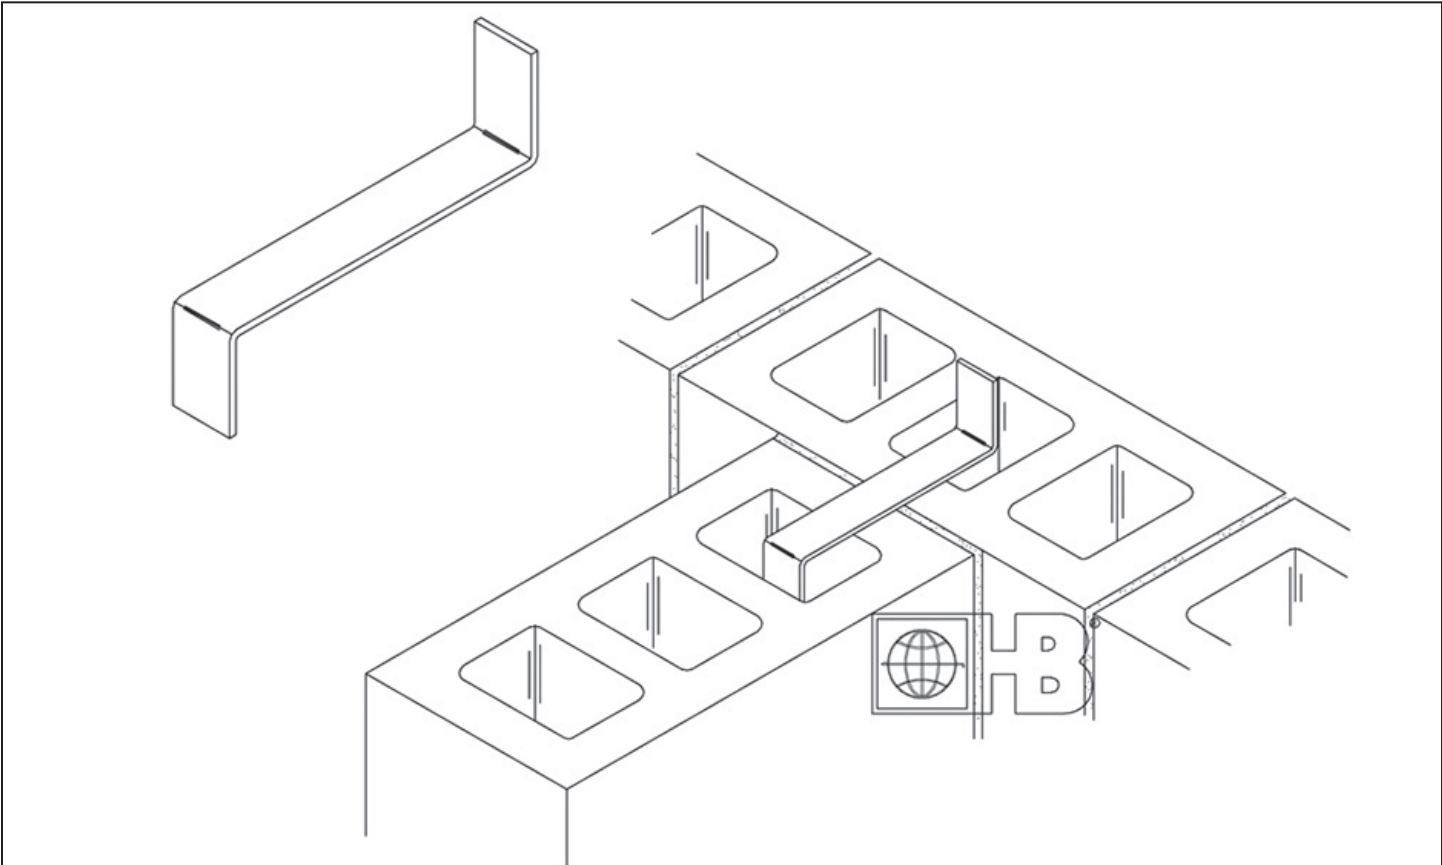

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

**344 Rigid Partition Anchor** for anchoring load bearing walls at intersections.

**MATERIAL CONFORMANCE**

**Sheet Metal (Carbon Steel):**

**ASTM A1008/A1008M, ASTM A36/A36M** (3/16" thick or greater)

Zinc Coating:

Hot-Dip Galvanized after fabrication: **ASTM A153/A153M** Class B

Note: Hohmann & Barnard will certify Hot-Dip Galvanized to a minimum of 2.0 oz/ft<sup>2</sup>

**Sheet Metal (Stainless Steel):**

**ASTM A666, ASTM A480/480M, and ASTM A240/A240M**

**AISI Type 304 or 316**

**Dimensions:**

Made to order from 1 1/4" or 1 1/2" wide x 1/8" or 1/4" thick bar stock x any length (state when ordering).

Standard lengths are 24" and bends are 2".

**Heavy duty carbon steel plate manufactured from 99% recycled material. Stainless Steel manufactured from an average of 60% recycled material.**

**Finishes:**

Plain Steel

Hot-Dip Galv. | Stainless Steel:  Type 304  Type 316

**Note: Hohmann & Barnard recommends Stainless Steel for maximum protection against corrosion.**

**Thickness:**

1/8"

1/4"

3/16"

Other \_\_\_\_\_

**Width:**

1"

1 1/2"

1 1/4"

2"

**Length:**

24" (standard)

Other \_\_\_\_\_

**IMPORTANT:** Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question.