


Ties & Anchors - Miscellaneous

VBT - Vee Byna-Tie®

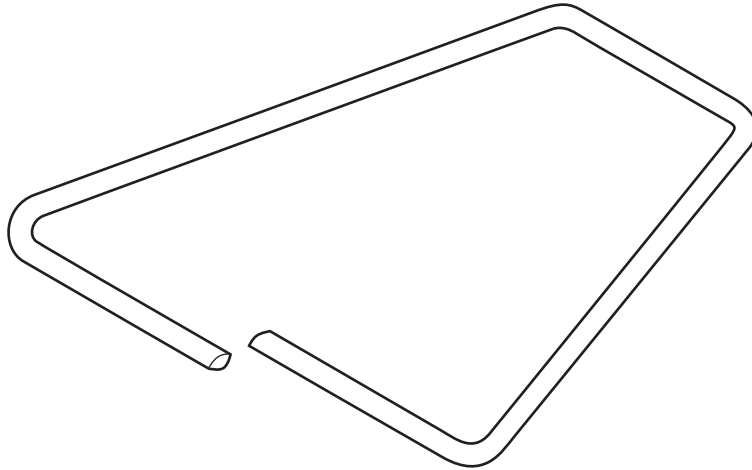

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

Description:

Vee Byna-Tie® is made for use with Hohmann & Barnard's DW-10 Series Anchors, X-Seal Anchors, or 359 Series Weld-On Ties.

Wire (Carbon Steel):

Cold-drawn steel wire conforming to ASTM A1064/A1064M:

Tensile Strength - 80,000 p.s.i.

Yield Point - 70,000 p.s.i. minimum

Zinc Coating:

Mill Galvanized: ASTM A641/A641M (0.1 oz/ft²)

Hot-Dip Galvanized after fabrication: ASTM A153/A153M-B2 (1.5 oz/ft²)

Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft²

Wire (Stainless Steel):

ASTM A580/A580M - AISI Type 304 (Type 316 available on special order)

Vee Byna-Tie® manufactured from a minimum of 95% recycled material.

Finishes:

- Mill Galvanized
- Hot-Dip Galvanized
- Stainless Steel Type 304 (Type 316 available on special order)

Note: Hohmann & Barnard recommends Stainless Steel for maximum protection against corrosion.

Vee Byna-Tie® Diameter:

- 3/16"Ø (standard)
- 1/4"Ø (heavyweight)

Vee Byna-Tie® Length:

- 3" 3 1/2" 4" 4 1/2"
- 5" 6" 7" 9"
- Other _____

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question.