




**HOHMANN & BARNARD, INC.**  
A MiTek - BERKSHIRE HATHAWAY COMPANY

# Veneer Anchors X-Seal™ Anchor

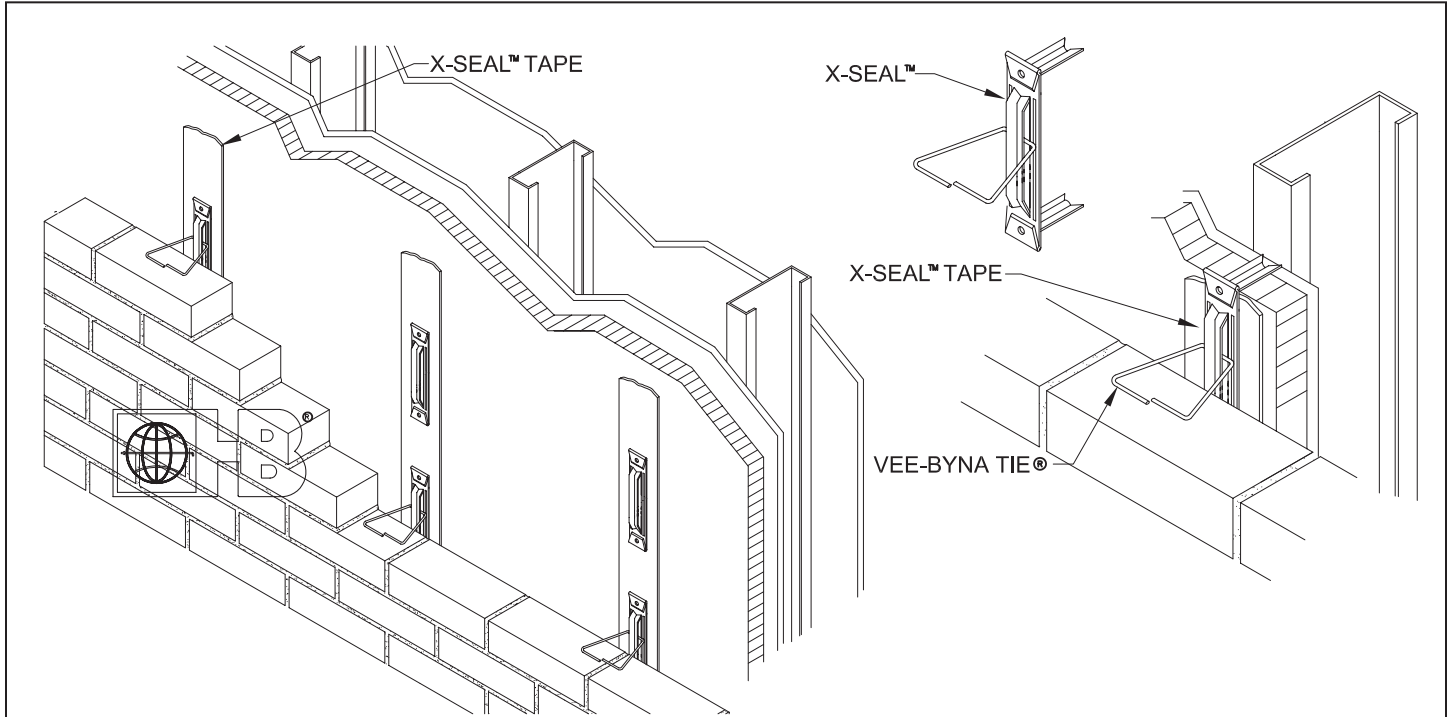

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

**H&B RECOMMENDS 16" X 16" SPACING**

**Description:**

The X-Seal™ Anchor is a veneer wall anchor that allows the backplate to seal sheathing from air and moisture infiltration while maintaining integrity of the vapor barrier.

**MATERIAL CONFORMANCE**

**Wire** (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to **ASTM A82/A82M**

Tensile Strength - 80,000 p.s.i. | Yield Point - 70,000 p.s.i. minimum  
Zinc Coating:

Hot-Dip Galvanized after fabrication: **ASTM A153/A153M-B** (1.5 oz/ft<sup>2</sup>)  
Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft<sup>2</sup>

**Wire** (Stainless Steel): **ASTM A580/A580M** - AISI Type 304 (Type 316 available on special order)

**Sheet Metal** (Carbon Steel): **ASTM A1008/A1008M**

Zinc Coating:  
Hot-Dip Galvanized: **ASTM A153/A153M Class B** (1.5 oz/ft<sup>2</sup>)  
(sheet metal ties and anchors galvanized after fabrication)  
Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft<sup>2</sup>

**Sheet Metal** (Stainless Steel): **ASTM A 666, ASTM A480, ASTM A240/A240M, and ASTM A167** - AISI Type 304 (Type 316 available on special order)

**X-Seal™ Tape:**  
**ASTM D751-95, ASTM D4533-91, ASTM G154-98, ASTM E96-B**

**X-Seal™ Anchor:**  
U.S. Patents 6,925,768, 6,941,717, 7,562,506, 7,587,874, 7,845,137  
Canadian Patent 2,458,008

**Finish:**

- Hot-Dip Galvanized
- Stainless Steel - Type 304 (Type 316 available on special order)

**Note: H&B recommends Stainless Steel for maximum protection against corrosion.**

**Leg Depth** (Equal to thickness of wallboard + insulation):

- |  |  |  |
|--|--|--|
| <input type="checkbox"/> X-Seal (1/2")   | <input type="checkbox"/> X-Seal (3/4")   | <input type="checkbox"/> X-Seal (1")     |
| <input type="checkbox"/> X-Seal (1 1/2") | <input type="checkbox"/> X-Seal (2")     | <input type="checkbox"/> X-Seal (2 1/2") |
| <input type="checkbox"/> X-Seal (3")     | <input type="checkbox"/> X-Seal (3 1/2") | <input type="checkbox"/> X-Seal (4")     |
| <input type="checkbox"/> X-Seal (4 1/2") |  |  |

**Thickness:**  14 Gauge

**Vee-Byna Tie® Diameter:**

- 3/16"Ø Standard
- 1/4"Ø Heavyweight

**Vee-Byna Tie® Length:**

- 3"       3 1/2"       4"       4 1/2"
- 5"       Other \_\_\_\_\_

**X-Seal® Tape:** Adhesive backed 3" x 75 ft. rolls  
(Seals around the shaft of the screws & legs of X-Seal™ Anchors at the point of penetration)

**HOHMANN & BARNARD, Inc.**  
CORPORATE HEADQUARTERS  
30 Rasons Court | Hauppauge, NY 11788  
T: 800.645.0616 F: 631.234.0683  
[www.h-b.com](http://www.h-b.com)

**Branch/Subsidiary Locations:**  
ALABAMA - ILLINOIS - MARYLAND  
NEW YORK - PENNSYLVANIA - TEXAS  
CANADA

© HOHMANN & BARNARD, INC. - 2013