

TRAVERTINE



Our select-cut travertine offers an upscale appearance that instantly welcomes and defines your space. These multi-shape tiles give you a random pattern that adds visual interest. Border with a contrasting travertine or tumbled paver to add additional dimension to the space. Select-cut travertine is perfect for climates that experience freeze-thaw cycles.



DesignPAVE®

PREMIUM
CONCRETE
PAVERS

PRODUCT SPECS



- a) Travertine Small Square – 8" x 8"
- b) Travertine Small Rectangle – 8" x 16"
- c) Travertine Large Square – 16" x 16"
- d) Travertine Large Rectangle – 16" x 24"
- e) Travertine Bullnose – 12" x 24"

Travertine pavers are 1 1/4" thick
Bullnose units are special order


APPLICATIONS

Urban street parking, entrance areas, porte caches, crosswalks, esplanades, light duty parking lots, residential driveways, patios, walkways, pedestrian malls, medians, terraces, pool decks, sidewalks, garden paths, roof gardens

COMPOSITION AND MANUFACTURE

Travertine pavers are made from a "no slump" concrete mix. Made under extreme pressure and high frequency vibrations, Travertine pavers have an average compression strength greater than 8000psi, a water absorption maximum of 5% and will meet or exceed ASTM C-936 and freeze-thaw testing per section 8 of ASTM C-67.

INSTALLATION PATTERNS

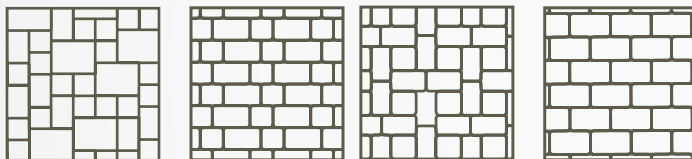

3 Piece Random
51% Standard Rec.
11% Large Rec.
38% Small Sq.

Muster D
40% Small Sq.
60% Standard Rec.

Muster K
72% Standard Rec.
28% Small Sq.

Running Bond
Standard Rec.,
Small Rec., or
Small Sq.

INSTALLATION

1. Excavate unsuitable, unstable or unconsolidable subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for use material (typically 4-6 in. of compacted base for light vehicular and pedestrian traffic) or as otherwise directed by Site Engineer/Architect/Landscape Architect.
2. Place bedding course of washed sand conforming to the grading requirements of ASTM C-33 to a maximum uniform depth of 1-1 1/2 in. (25-38mm) screeded to the grade and profile required.
3. Install Travertine Pavers with joints approximately 1/8 in. (3mm).
4. Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaging edges.
5. Tamp pavers with a plate compactor, uniformly level, true to grade and free of movement.
6. Spread sand to 1/8 inch (3mm) thickness over entire paving area.
7. Make one more pass with plate compactor to fill joints with sand.

Complete installation and specification details are available by contacting your Oberfields Sales Representative.

PACKAGING INFO

| PRODUCT | WEIGHT PER SQ. FT. | UNITS PER SQ. FT. | UNITS PER BAND | UNITS PER CUBE | WEIGHT PER CUBE | SQ. FT. PER UNIT | SQ. FT. PER BAND | SQ. FT. PER CUBE | COLORS STOCKED |
|------------|--------------------|-------------------|----------------|----------------|-----------------|------------------|------------------|------------------|---------------------------------------|
| Travertine | | | | | 3000 | | | 200 | Classic Ivory, Noche, Tuscany, Walnut |