



90° CORNER

- Bullnose edge on outside
- Weight: 135 lbs.

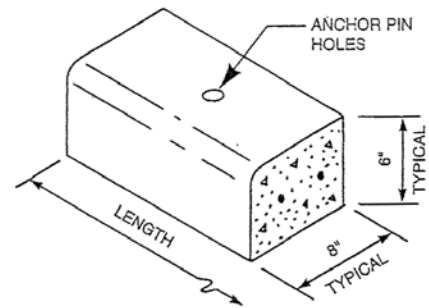


STRAIGHT SECTION

- Lengths: 3', 4', 5', 6' & 8'
- Weight: 48 lbs./ft.

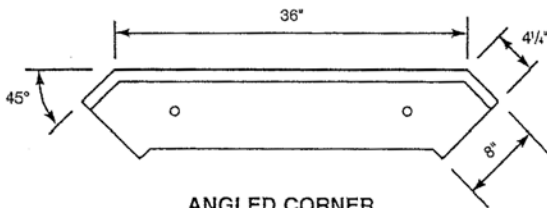


ANGLED CORNER

- Bullnose edge on outside
- Weight: 157 lbs.

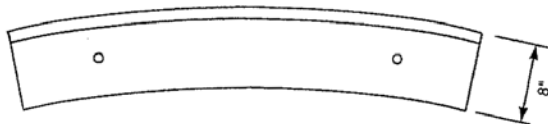

OUTSIDE CURVE

- Bullnose edge on outside
- Lengths: 4' sections
- Radius: 5', 10', 15' & 18'
- Weight: 193 lbs.



INSIDE CURVE

- Bullnose edge on inside
- Lengths: 4' sections
- Radius: 18' only
- Weight: 193 lbs.

BASIC USES AND FEATURES

- Ideal for perimeter of parking lots where adjacent walks, lawn areas or plant beds are elevated above the parking lot pavement.
- Surface curbing is economical since installation occurs after parking areas are paved.
- Can be used as edge restraint for concrete pavers.

COMPOSITION & MATERIALS

- Concrete: Air entrained, achieving 5000 PSI compressive strength in 28 days.
- Reinforcing: Steel rebars in each unit.

AVAILABLE FINISH

- Smooth As-cast Surfaces, natural concrete color.

AVAILABLE ANCHOR PINS (Not Pointed)

- 1/2" dia. x 14" long – Steel (50 pins per bundle)
- 5/8" dia. x 24" long – Steel (25 pins per bundle)