


Ties & Anchors - Miscellaneous MWT - Mesh Wall Tie

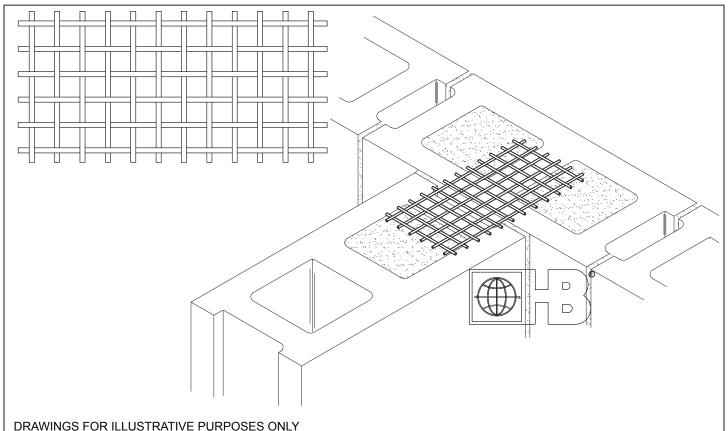

MWT - Mesh Wall Tie:

- For bonding intersecting masonry walls
- Conforms to ASTM A185

Dimensions:

- 1/2" square x 16 gauge
- Available in 100' rolls standard, width to suit
- Cut to any width or length required

Material Conformance

- Cold-drawn steel wire (ASTM A82)
- Hardware Cloth (ASTM A740):
- Hot-Dip galvanized (ASTM A153/A153M-B2 Class B)
- Stainless Steel (ASTM E2016, Type 304)

Note: Hohmann & Barnard recommends Stainless Steel for maximum protection against corrosion.

FINISHES:

- □Hot-Dip galvanized
- ☐Stainless Steel

LENGTH (100' rolls standard, specify piece length below):

- □ 8"
- □ 12"
- □ 100' roll (standard)
- □ Other

WIDTH (for roll or piece):

- ☐ 3" wide for 4" wall
- \square 4" wide for 6" wall
- ☐ 6" wide for 8" wall
- ☐ 8" wide for 10" wall
- ☐ 10" wide for 12" wall
- □ Other ____

GAUGES:

- □ 1/2" square x 16 ga. (Standard)
- ☐ 1/4" square x 23 ga.

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question.

HOHMANN & BARNARD, Inc.

30 Rasons Court | Hauppauge, NY 11788 CORPORATE HEADQUARTERS

T: 800.645.0616 F: 631.234.0683

www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - ILLINOIS - MARYLAND
NEW YORK - PENNSYLVANIA - TEXAS
UTAH - CANADA

© HOHMANN & BARNARD, INC. - 2014